

Type:	Customer outlet	
Ref:	VFTO-E1, see ordering information	REV: 1.3
Date:	15.12.2016	AL
Modification:	23.07.2021	DP

FTTH Solutions

FIBRAIN VFTO-E1 Customer outlet



DESCRIPTION:

- Up to 2 pieces of SC sx / LC dx adapters
- Holder for 4 splices
- Description field for adapters on a top part of an outlet with a transparent flip cover;
- Possibility to personalize the outlet (logo, website, helpdesk phone number);
- Optional adapter for DIN rail
- Optional wall support


TECHNICAL SPECIFICATION:

Technical data	VFTO-E1
Adapter type	Flangeless (SC simplex, LC duplex)
Material	ABS UL94-V0
Adapter material DIN	PA6 GF UL94-V0
Dimensions (w)x(h)x(d) [mm]:	85x85x28
Temperature:	-20C – +50C
Protection level:	IP40/IK06
Mounting:	Indoor, wall, rail (DIN standard)
Cassette capacity:	4 fusion, 2 mechanical, 4 ANT splices
Fiber type:	15mm bending radius, compatible with A1, A2, A3, B2, B3 standards
Length of extra fiber:	900um – 100cm fiber in an outlet 250um – 200cm fiber in an outlet
Cable entries:	1 entry in each outlet (1 port on a side) 1 entry port in each part of the outlet (1 port on a side) Entries from outer part of an outlet (mounting on a flush mount box) All entry ports are defined by removing a blind adapter Max. diameter of cables: 4mm


ADDITIONAL EQUIPMENT:

Support for VFTO-E1 outlet: - wall support for VFTO-E1 outlet - DIN support for VFTO-E1 outlet	VFTO-E1-SUP-1 VFTO-E1-DIN-1
--	--------------------------------


Type:	Customer outlet	
Ref:	VFTO-E1, see ordering information	REV: 1.3
Date:	15.12.2016	AL
Modification:	23.07.2021	DP

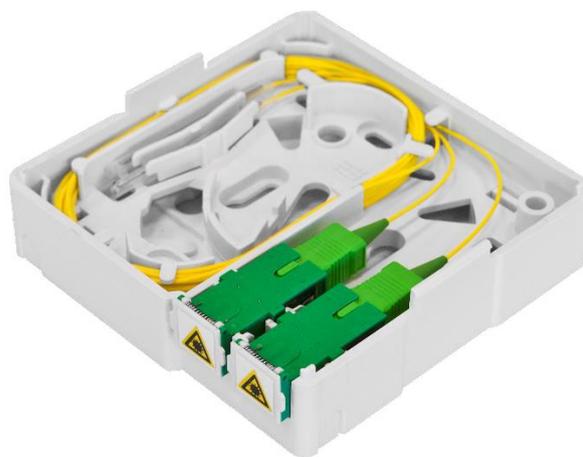

View of VFTO-E1 without logo equipped in two SC APC pigtails and two Premium One-Piece adapters with outer shutter

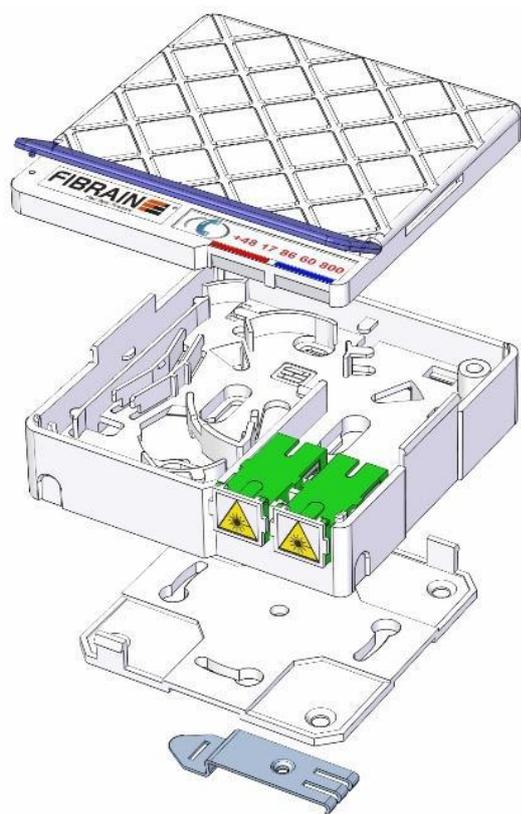

Outlet design

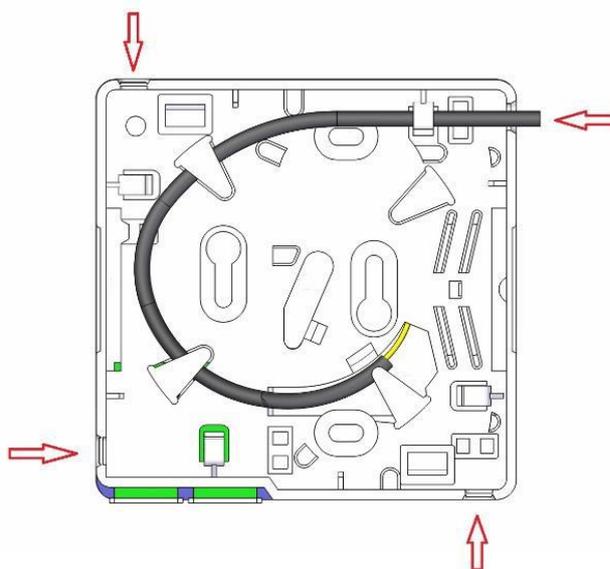

Cable entry ports

Type:	Customer outlet	
Ref:	VFTO-E1, see ordering information	REV: 1.3
Date:	15.12.2016	AŁ
Modification:	23.07.2021	DP

FTTH Solutions

ORDERING INFORMATION:

VFTO-E1-AA-B-CDE-FGH

Ordering syntax:

AA – Cover logo

BL – without logo

FB – with Fibrain logo

B – Support:

0 – none;

1 – VFTO-E1-SUP-1

2 – VFTO-E1-DIN-1

C – Number of FO adapters:

0 – 2

D – Adapter class:

1 – Standard One-Piece

3 – Premium One-Piece with internal shutter

4 – Premium One-Piece with outer shutter

E – Type of FO adapter (only flangeless):

0 – none

1 – SC/PC,

2 – SC/APC,

3 – E2000/PC (standard type),

4 – E2000/APC (standard type),

5 – LC DX

6 – LCA DX

F - Pigtail number:

0 – 4

G – Fiber type:

D – G.657A1

E – G.657A2

G – G.657B3

H – Pigtail grade:

G – Gold

Example:

VFTO-E1-BL-1-122-1DG

Fibrain VFTO-E1 customer outlet with one premium adapter with inner shutter SC/APC SX with pre-installed SM G.657A1 pigtail and adapter for DIN rail.

This document and the statements contained in it, are not intended for customers within the meaning of Civil Code. The information submitted in this document is to our knowledge and belief true at the time of issue, however, we do not assume any liability whatsoever for its accuracy, and completeness. This document is for informational purposes on an "as is" basis only, and Fibrain reserves the right to change its contents at any time without prior notice. The specification cannot in any case be considered an offer within the meaning of the Civil Code and is not contractually valid unless specifically authorized by Fibrain. Before using this product, its buyer and/or user has to make sure that it is suitable for the intended use. All liability issues related to this product are subjected to the seller's separate Terms of Sale or the terms and conditions agreed with the Fibrain representative or distributor.